LC CONNECTOR
光纖連接器零件 PART NO. :

Specification

		SM	MM
Insertion Loss	Premium UPC	0.08dB typical	0.15dB
	Premium APC	0.10dB typical	
	Standard connector	0.12dB typical	0.20dB
Return Loss		≥55dB typical (PC) ≥68dB typical (APC)	
Durability		< 0.1dB typical Change , 500 matings	
Operating Temperature		-40ºC to +75ºC	
Ferrule Hole Sizes		125.5µm +1/-0,Concentricity: ≤ 1µm	127µm (MM)

Order

LC- [A] [B] [C] [D] [E] - 300

A Connector	B Ferrule	C Housing	D Boot Type	E Boot Color
1 : Pre-Assemblied	1 : SM	1 : Blue	1 : 3.0 mm cable standard	1 : Blue 4 : Yellow
2 : Unassemblied	2 : MM	2 : Black	2 : 2.0 mm cable standard	2 : Black 5 : White
		3 : Beige	3 : 0.9 mm fiber boot	3 : Red

ALC- [A] [B] [C] [D] [E] - 300

A Connector	B Ferrule	C Housing	D Boot Type	E Boot Color
1 : Pre-Assemblied	1 : Cone	1 : Grenn	1 : 3.0 mm cable standard	1 : Grenn
2 : Unassemblied	2 : Step		2 : 2.0 mm cable standard	
3 : 8° Pre-Angled			3 : 0.9 mm fiber boot	

LC- [A] [B] -350

A Duplex Clip	B Duplex Clip Color
1 : Type 1	1 : Blue
2 : Type 2	2 : Clear

Type 2

Type 1

LC CONNECTOR
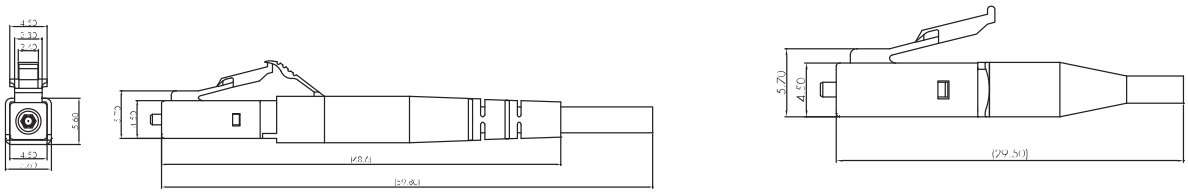
光纖連接器零件 PART NO. :