

E2000 CONNECTOR

光纖連接器零件

PART NO. :



Specification

		SM , APC (8°)	SM	MM
Insertion Loss	all fibers	0.2dB typical	0.2dB	0.20dB
	single fiber (max.)	0.35dB typical	0.75dB	0.50dB
Return Loss		≥65dB	≥50dB	
Operating Temperature		-25°C to +70°C		

Order

E2K- A B C D - 300


A **B** **C** **D**
Connector Ferrule & Housing Crimpset Type Lever Color

1 : R&M
2 : SHUNER

1 : SM (Blue)
2 : MM (Black)
3 : APC (Grenn)

1 : Pigtail (Blue)
2 : Pigtail (Black)
3 : Pigtail (Grenn)
4 : 1.7-2.0 Cable (Blue)
5 : 1.7-2.0 Cable (Black)
6 : 1.7-2.0 Cable (Red)
7 : 1.7-2.0 Cable (Grenn)
8 : 2.2-2.2 Cable (Blue)
9 : 2.0-2.2 Cable (Black)
0 : 2.0-2.2 Cable (Grenn)
A : 2.6-2.9 Cable (Blue)
B : 2.6-2.9 Cable (Black)
C : 2.6-2.9 Cable (Grenn)
D : 2.9-3.2 Cable (Blue)
E : 2.9-3.2 Cable (Black)
F : 2.9-3.2 Cable (Red)
G : 2.9-3.2 Cable (Grenn)

1 : Blue
2 : Black
3 : Red
4 : Yellow
5 : Brown
6 : Grenn
7 : Orange
8 : White
9 : Violet
0 : Turquoise

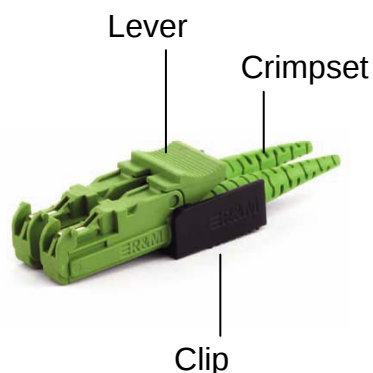

E2K- A B - 350

A **B**
Duplex Clip Duplex Clip Color
1 : Clip **1** : Black